


## SUGGESTED MINIMUM GARAGE INTERIOR DIMENSIONS

**LENGTH** 46' 9"  
**WIDTH** 16' 9"  
**CEILING HEIGHT** 14-16 FT. CLEAR



**LifeLineMobile®**  
 PROFESSIONAL SPACE IN MOTION

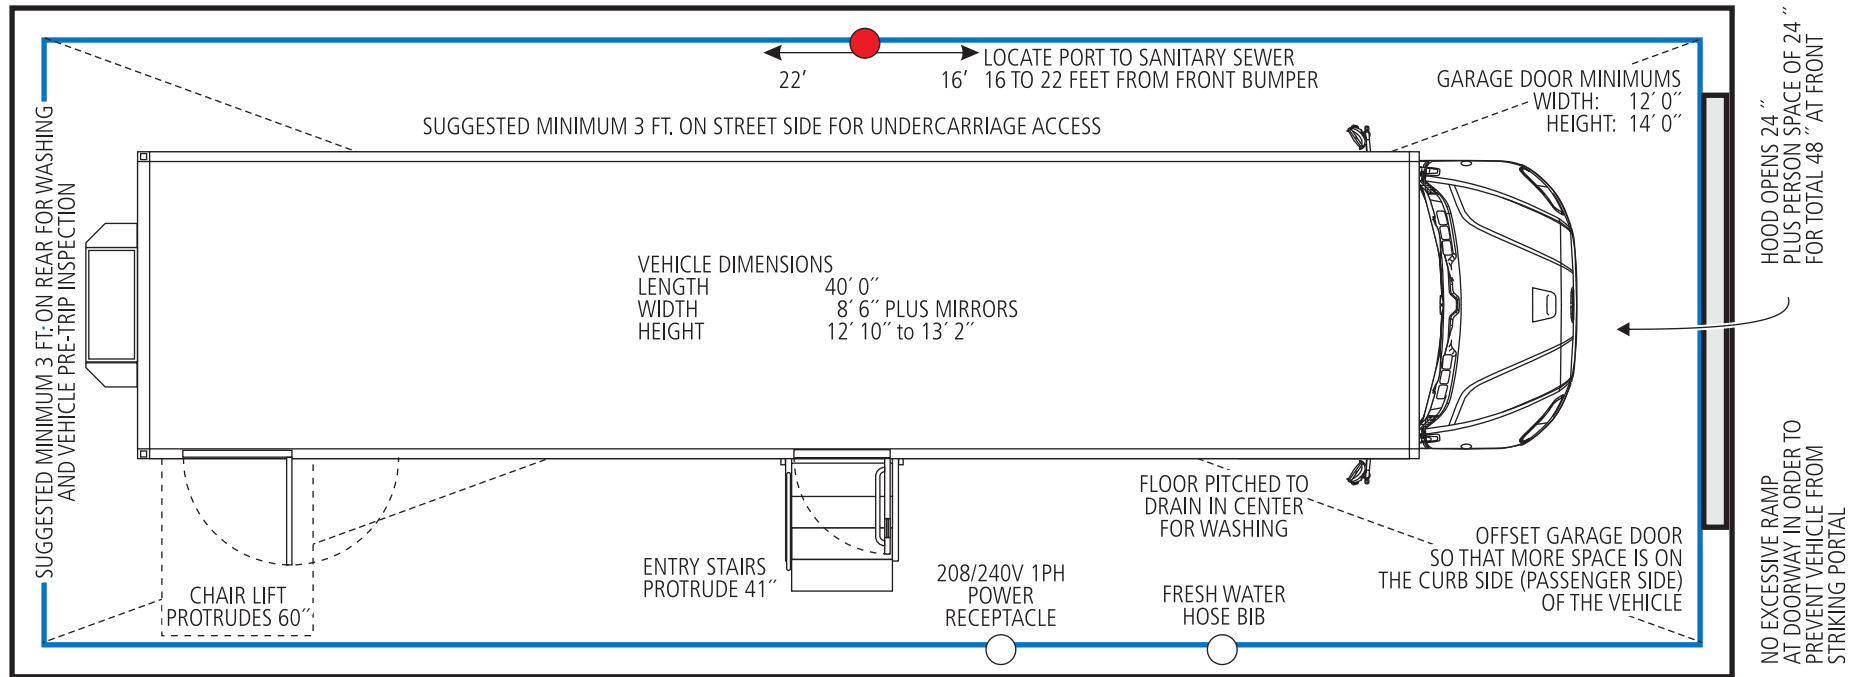

### SPECIAL NOTE

DRAWING ASSUMES THAT DRIVER BACKS VEHICLE INTO GARAGE FOR EXTRA SAFETY WHEN EXITING.

SOME OWNERS PREFER DRIVER TO PULL FORWARD INTO GARAGE IN ORDER TO MINIMIZE TAIL SWING DAMAGE AT PORTAL WHEN LEAVING. IF SO, REVERSE DRAWING SPACING TO REFLECT ORIENTATION OF CURB SIDE OF VEHICLE

### CONSIDERATIONS:

EXTRA SPACE FOR RE-STOCK OF THE MOBILE UNIT SHOULD BE CONSIDERED

FLAMMABLE STORAGE FOR CERTAIN LUBRICANTS AND/OR CLEANING SUPPLIES IS DESIRABLE


LOCKING STORAGE FOR VALUABLES IS DESIRABLE

PERSONNEL DOOR IS DESIRABLE (NOT SHOWN)

REMOTE CONTROLLED GARAGE DOOR OPERATION IS PREFERRED, BUT NOT NECESSARY

**SUGGESTED MINIMUM PARKING DIMENSIONS**

**LENGTH**            45-50' '  
**WIDTH**                17' '  
**OVERHEAD**            14-16 FT. CLEAR

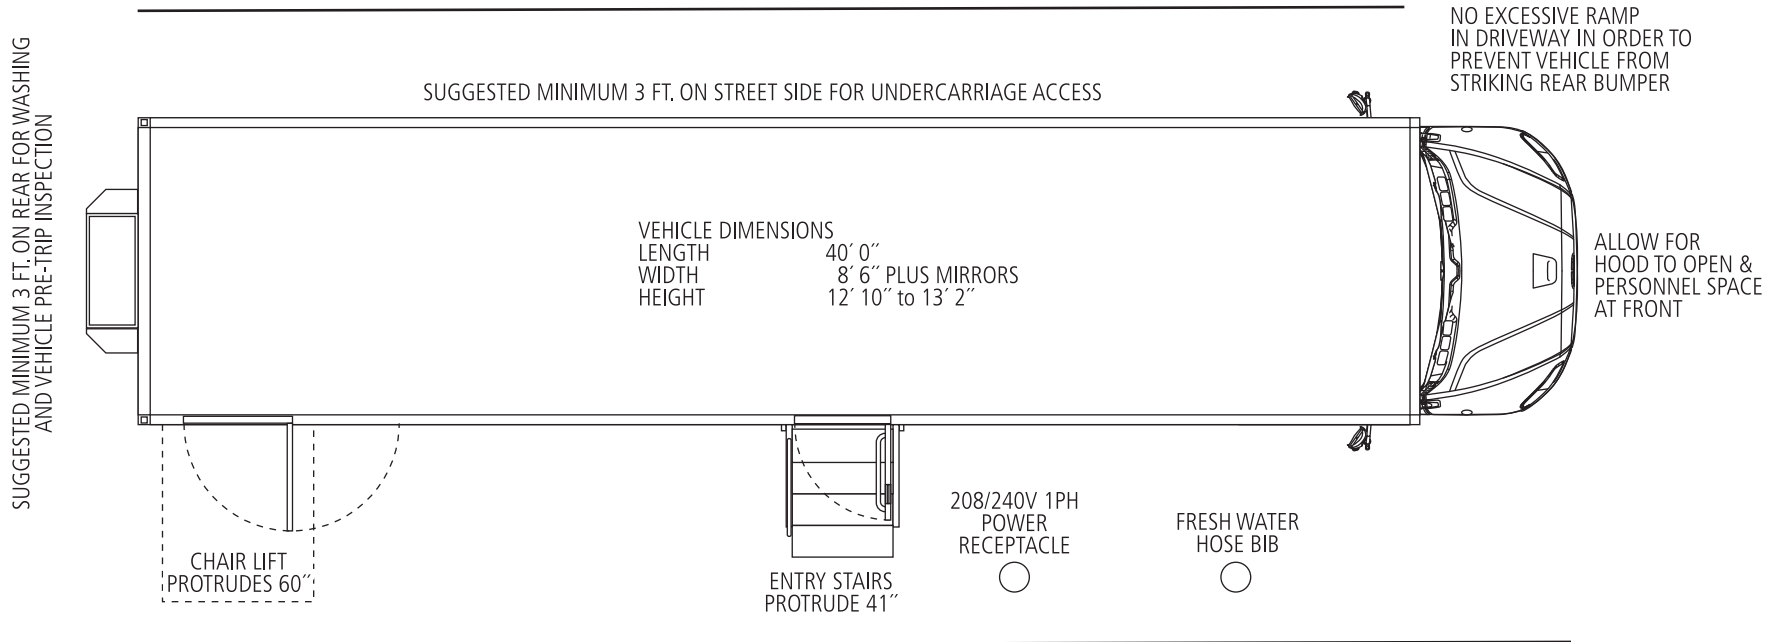

**LifeLineMobile®**  
 PROFESSIONAL SPACE IN MOTION



CONSIDERATIONS:

EXTRA SPACE FOR RE-STOCK OF THE MOBILE UNIT SHOULD BE CONSIDERED

FLAMMABLE STORAGE FOR CERTAIN LUBRICANTS AND/OR CLEANING SUPPLIES IS DESIRABLE

LOCKING STORAGE FOR VALUABLES IS DESIRABLE

A "PULL-THROUGH" SPACE IS PREFERRED IN ORDER TO MINIMIZE BACKING AND TIGHT TURNS

PARALLEL PARKING WILL REQUIRE A MINIMUM 55-60 FT PARKING SPACE